

PCT/GB2004/00437C



REC'D 11 NOV 2004	
WIPO	PCT



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

BEST AVAILABLE COPY

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

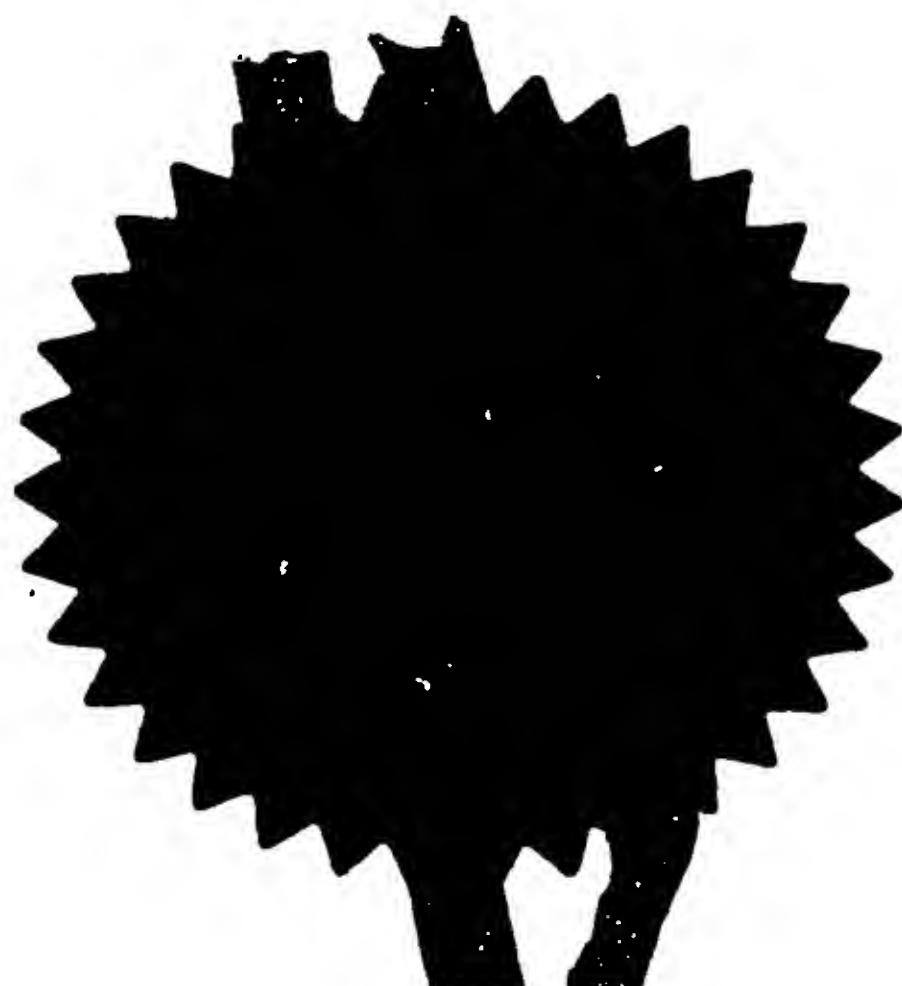

Signed

H. Behan

Dated

20 October 2004

Patents Form 1/77

Patents Act 1977
(Rule 16)



200CT03 E845554-1 D10208
P01/7700 0.00-0324374.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

E1045.GB#

2. Patent application number

(The Patent Office will fill in this part)

0324374.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Hammersmith IMANET Limited
Cyclotron Building
Hammersmith Hospital
London W12 0NN
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8736043001
(Incorporated in the UK)

4. Title of the invention

Method of, and Software for, Conducting
Motion Correction for a Tomographic Scanner

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Electronic Intellectual Property ~~Amersham plc~~
Suite 308, The Foundry ~~Amersham place~~
156 Blackfriars Road ~~Little Chalfont~~
London SE1 8EN ~~Buckinghamshire~~
HP7 9NA

Patents ADP number (if you know it)

8144297002 8189375004 (5/21 10/1/77)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

16

Claim(s)

4

Abstract

1

Drawing(s)

6+6 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

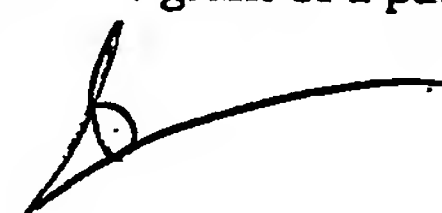

Date

17 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr Jerome Spaargaren – 020 7721 7152

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Method of, and Software for, Conducting Motion Correction for a
Tomographic Scanner

Field of the Invention

5 This invention relates to a method of, and computer software for, conducting motion correction for a tomographic scanner, in particular but not exclusively a positron emission tomography (PET) scanner.

Background of the Invention

10 A typical emission scan using a PET scanner begins with the injection of a solution including a tracer, which is a pharmaceutical compound including a radio-isotope with a short half-life, into the subject. The subject may be human or animal. The tracer moves to, and is typically taken up, in one or more organs in the subject according to biological and biochemical processes which occur
15 within the subject. When the radio-isotope decays, it emits a positron, which travels a short distance before annihilating with an electron. This annihilation produces two high energy photons propagating in opposite directions. The PET scanner includes a photon detector array arranged (usually in a ring-shaped pattern) around the scanning area. If two photons are detected within a short
20 timing window, a so-called "coincidence" is recorded along a line of response (LOR) connecting the two detectors. Coincidence counts along each LOR are listed each time a coincidence is detected between the corresponding detector pair, and subsequently the list is processed by, for each event, incrementing a data storage part referred to as a sinogram bin to build up a sinogram. The
25 output sinogram is typically processed using image reconstruction algorithms to obtain volumetric medical images of the subject.

For quantitative results from PET images, attenuation correction generally forms one of the data correction stages. In a conventional PET scanner, the scanner is provided with one or more positron emitter rod sources,
30 formed of a material such as ^{68}Ge , which emit dual annihilation photons. To derive attenuation factors, two acquisitions using the rod sources are conventionally used – a blank scan, in which the subject being scanned is not

present in the scanning area (typically, the scanner is empty except for the presence of the sources) and a transmission scan in which the subject is present in the scanning area. Since the source material is a positron emitter, the two photons arising from the annihilation of a positron and an electron are acquired in coincidence, in the same manner as with an emission scan. Conventionally, the results of the blank scan are then divided by the results of the transmission scan to derive an attenuation sinogram. The attenuation sinogram is then used to correct the emission scan for attenuation.

Typical PET scanners have detector arrangements which do not rotate during an acquisition. Typically, the detectors are arranged in two or more banks of detector rings. Alternatively, the detectors may be arranged in a non-ring-shaped pattern. In any case, there will generally be directions in which coincidences are not detectable due to the geometry of the detector array, since the scanner has a finite field of view and there may be "blind spots" due to gaps between the detectors, etc.

With the increasing resolution of PET scanners, subject movement becomes an important degrading factor in the quality of the data. For example with brain scans, head movement causes a time-varying rigid body transformation of the brain, and hence of the radioactivity distribution to be reconstructed. The head movement can be externally monitored, and the effects of the monitored movements can be corrected. Several methods have been proposed to correct for subject movement. They fall into 3 classes:

(a) Post-processing of the image using deconvolution. See for example the paper by M. Menke, M.S. Atkins, K.R. Buckley, "Compensation Methods for Head Motion Detected During PET Imaging", IEEE TNS vol. 43, (1996) 310.

(b) Multiple Acquisition Frame (MAF) methods, i.e. splitting the acquisition into short time frames (which may be triggered by a threshold on the amount of motion), followed by reconstruction each short time frame, realignment of the images and then combining all these images into one image. See for example the paper by Y. Pickard, C.J. Thompson, "Motion correction of PET images using multiple acquisition frames", IEEE TMI vol. 16 (1997) 137.

(c) Acquiring the data in list-mode and realigning the events according to the known motion before binning them into a sinogram, followed by reconstruction of the sinogram. See for instance the paper by P. Bloomfield, T.J. Spinks, J. Reed et al., "The design and implementation of a motion correction scheme for neurological PET", PMB 48 (2003) 959 for a discussion of the merits of these methods and more complete references, and a paper by S.K. Woo, H. Watabe, et al, "Sinogram-based motion correction of PET Images using Optical Motion Tracking and List-mode Data", Conf. Proc. IEEE MIC 2002. Both the Bloomfield et al. paper and the Woo et al. paper describe reconstructing the data with a Fourier Rebinning (FORE) algorithm followed by a Filtered Back Projection (FBP) algorithm, and mention that artefacts in the images depending on the type of motion.

A paper by H. Watabe, N. Sato, et al, "Correction of Head Movement Using Optical Motion Tracking System during PET Study with Rhesus Monkey", "Brain Imaging Using PET" eds. M. Senda, Y. Kimura, P. Herscovitch, Academic Press ISBN 0-12-636651-9 p1-8 2002 observes that in 2D PET, rotation can move LORs to oblique LORs, and suggested a solution which essentially amounts to a Single Slice Re-Binning (SSRB) approximation.

It is an object of the present invention to provide improvements relating to motion correction for tomography, in particular but not exclusively PET scanners.

In accordance with one aspect of the present invention there is provided method of conducting motion correction for a tomographic scanner including a detector array for detecting radiation to generate detector data, wherein the method comprises:

storing detector data collected during a data acquisition period, said detector data being indicative of:

- i) directions along which radiation is detected; and
- ii) quantities of radiation detected in different of said directions;

storing movement data representing movement of the subject during the data acquisition period; and

motion correcting said detector data using said movement data and a motion correction algorithm to calculate motion corrected detector data,

wherein said motion correcting step comprises processing said detector data by:

- 5 a) realigning directions of at least some of said detector data on the basis of said movement data; and
- b) altering quantities of at least some of said detector data on the basis of said movement data,

such that at least some of said detector data are both realigned and altered
10 in quantity.

In preferred embodiments of the invention, the altering quantities step comprises scaling quantities upwards and/or replacing quantities with calculated quantities. Preferably, the method comprises selectively either scaling a quantity upwards or replacing a quantity with a calculated quantity. Alternatively, the
15 method may comprise altering the quantity so that it the altered quantity takes into account both the original quantity and a separately calculated quantity (for example, by weighted average of a rescaled quantity and a separately calculated quantity.)

Typically, the motion corrected data will then be used as input data for an
20 image reconstruction algorithm to produce a reconstructed image. The present invention provides a new motion correction procedure which can be used to reduce the appearance of artefacts in the reconstructed images due to particular types of motion of the subject, including translation along the scanner axis and rotation about a rotation axis orthogonal to the scanner axis.

25 Aspects of the invention further include computer software and a scanner system arranged to carry out the method of the invention.

Further features and advantages of the present invention will become apparent from the following description of preferred embodiments of the present invention, made by way of example only with reference to the accompanying
30 drawings.

Brief Description of Drawings

Figure 1 is a schematic diagram of a PET scanning facility;

Figure 2 is a schematic diagram of data processing components in a PET scanner and an associated data processing terminal;

5 Figure 3 is a schematic cross section of the arrangement within a PET scanner during an emission scan acquisition;

Figure 4 is a flow diagram illustrating a general data processing procedure conducted, including motion correction according to an embodiment of the invention;

10 Figure 5 is an illustration of areas of missing data in a sinogram due to axial linear motion of the subject during an emission scan acquisition; and

Figure 6 is an illustration of areas of missing data in a sinogram due to non-axial rotational motion of the subject during an emission scan acquisition.

15 Detailed Description of Preferred Embodiments

Referring now to Figure 1, a PET scanning facility, arranged in accordance with an embodiment of the invention, is shown, which includes a PET scanner 2, a tracer generator module 4 and an operator computer terminal 6. The scanner 2 includes a detector array 8 arranged about a scanning area, in
20 which a subject 10 is located during a transmission scan and during an emission scan.

One embodiment of the invention relates to a non-rotating PET scanner. For example, a PET scanner of the ECAT EXACT3D™ type is used. In this example, the detectors in the detector array 8 are arranged in square detector
25 blocks, each containing multiple detector elements. The detectors are arranged in multiple rings of detector blocks, the rings being arranged adjacent one another along a scanner axis.

As shown in Figure 2, the PET scanner 2 includes a control unit 30, detection data processing circuitry 32, a motion detector 34, a data store 36 for
30 storing the detector data and movement data, and an Input/Output (I/O) device 38.

In this embodiment, the motion detector 34 is in the form of a PolarisTM measurement device (produced by Northern Digital Inc. of Waterloo, Canada), which measures the motion of a plate with four reflectors using infrared radiation. This plate is attached to a neoprene cap closely fitting the head of the subject, so as to track movement of the head, to produce movement parameters indicating translational motion along three orthogonal axes and rotational motion about three orthogonal axes.

The computer terminal 6 includes a central processing unit (CPU) 42, memory 44, hard disc drive 46 and I/O device 40, which facilitates interconnection of the computer 6 with the PET scanner 2. Operating system programs 48 are stored on the hard disc drive 46, and control, in a known manner, low level operation of the computer terminal 6. Program files and data 50 are also stored on the hard disc drive 46, and control, in a known manner, outputs to an operator via associated devices. The associated devices include a display, a pointing device and keyboard (not shown), which receive input from, and output information to, the operator via further I/O devices (not shown). Included in the program files 50 stored on the hard drive 46 are a motion correction software application 52 and an image reconstruction software application 54. A database 56 is used to store the detector data and movement data transferred from the PET scanner 2.

In acquisition mode, the detection data processing circuitry 32 processes all events detected in the detector array 8, and by using a coincidence timing window, detects coincidences between the events which are recorded as real coincidence counts. These coincidence counts are then output in list-mode to data store 36, where it is stored a list-mode file for subsequent processing. In parallel with the data acquisition by the radiation detectors, position data is collected at regular, sub-second intervals (e.g. 10Hz) from motion detector 34 and also sent to data store 36 for subsequent processing.

Figure 3 illustrates features of operation of the PET scanner during an emission scan. During an emission scan, the subject 10 is placed in the scanning area and contains the tracer generated by the tracer generator module 4. Figure 3 shows a positron emission event being registered in the detector array 8. The

positron 60 annihilates and generates a first photon 62 travelling in one direction and a second photon 64 travelling in an opposite direction. The first photon is detected by a detector element 70 on one side of the detector array 8, and the second photon 64 is detected in a different detector element 72 on the other side of the detector array 8. As described above, the detection data processing circuitry 32 registers the two as a coincidence along the LOR defined between the two different detectors 70, 72.

The motion correction procedure carried out using motion correction software application 52 includes, in one embodiment of the invention, the stages illustrated in Figure 4. These are the stages of acquiring the detector data in list-mode 100, weighting each list-mode event with the normalisation factor appropriate for the original detector pair 102, performing motion correction 104, binning the realigned list-mode events into sinograms 106, and image reconstruction 108.

In the realignment during motion correction 104, for each event in the list-mode file, the LOR is repositioned according to the motion parameters derived from the motion detector 34. This can be done at sub-second time-resolution, since the list-mode data has a time resolution which is higher than that of the motion detector data (which is itself available at frequencies up to 20Hz.) The reoriented LOR is then stored in an appropriate sinogram bin using an interpolation method such as nearest neighbour interpolation.

Since the scanner has a finite field of view the motion corrected LORs can sometimes fail to fill the whole 3D sinogram, with parts of the sinogram being completely missing or having too low values because they are 'filled' only partly during the whole acquisition.

Two particularly problematic cases have been identified: axial translation and rotation around an axis which is not parallel to the scanner axis (for instance caused by the subject nodding). These two problems are illustrated in Figures 5 and 6 respectively, which show schematically a uniform cylinder phantom 200 placed in the scanner, and moved between two discrete positions, from a first position 200A to a second position 200B (Figure 5) and a third position 200C (Figure 6).

Translation along the axis of the scanner

Figure 5 illustrates the case in which the subject has moved outward (i.e. away from the bed end furthest from the scanner), and the motion correction is such as to tend to reposition it towards the centre of the scanner. There is no measured data that will be repositioned into the set of non-oblique LORs at the end of the detector array. So, the reconstructed image will have problems in the end-planes.

Further, in a 3D PET acquisition, data for oblique LORs are also acquired. Oblique LORs are those in which each end of the LOR is on a different ring (the number of rings separating the respective sides of the LOR is referred to as a ring-difference.) For each ring-difference, the same number of oblique end-LORs will be affected, as can be seen on Fig.5, which illustrates the missing oblique data for a selected ring difference. These missing oblique end-LORs would have, had the subject not moved, measured parts throughout the subject which are not near the ends of the scanner. In fact, for the maximum ring difference, the missing LORs go right through the centre of the scanner axis. If the fact that these end-LORs are erroneous is not taken into account, the resulting image will show artefacts. The type of artefact depends on the reconstruction algorithm used, as each algorithm reacts differently to inconsistent data.

As an example, a 'sagittal' slice was taken through the reconstructed image of a motion corrected cylinder, i.e. a slice through the axis of the scanner. An analytic reconstruction algorithm called three dimensional reprojection (3DRP) was used. Artefacts were clearly visible in the object relatively far from the end-planes. This can be explained by the edge enhancement of the Colsher filter together with the fact that, in this experiment, the data for the end-LORs for a fixed ring difference were underestimated, while the reprojected data were not. The artefacts obtained using the FORE analytic reconstruction algorithm were less severe, but were still clearly visible in areas away from the edge of the cylinder.

Rotation around an axis orthogonal to the scanner axis

Figure 6 illustrates the case with rotation of the subject about an axis orthogonal to the scanner axis. On realignment during the motion correction procedure, the set of oblique LORs, those making angles relative to the line connecting diametrically opposite detectors in the plane of the moment within the angular extent of the rotational movement, will have missing data. Therefore, if the rotation is too large (i.e. larger than the axial acceptance angle of the scanner), the motion corrected segment will again cause problems in the
 10 throughout the scanner, not only in the end-planes.

Continuous motion

In this case, the sinogram resulting after the binning process can be seen to be simply a superposition of sinograms obtained for very small time duration. Some bins in the projection data produced by the rebinning procedure described
 15 above will have the same value as if no motion had occurred, but others will have a smaller value, depending on how many of these very short time frames would fill data in the bin.

In the notation used herein, elements of the (3D) sinogram are indexed by
 20 b (for bin). The projection data that is obtained for the subject in the position at time t will be denoted by s'_b and the reference position, at which the reference sinogram is taken, is denoted with a subscript r . The number of very short time frames is denoted by N . The motion correction procedure of binning each list-mode event into a sinogram bin can be seen as a linear process which can be
 25 conceptually encoded in a matrix M' that will change with t :

$$s = \frac{1}{N} \sum_t M' s' \quad (1)$$

Note that this matrix M' combines the repositioning of the LORs with the binning into a sinogram. So, it would have dimensions $n \times m$ where n is the number of sinogram elements after binning, and m is the number of possible
 30 LORs, with $n < m$ being the usual case.

Each motion corrected sinogram should be the same as the reference sinogram, except for the missing data, at least if discretisation and interpolation errors are ignored. So:

$$M^t s^t \approx \text{diag}(d^t) s^r \quad (2)$$

5 where $\text{diag}(d^t)$ is a diagonal matrix with elements d^t_b on the diagonal which are 0 where the data are missing, 1 for bins which were completely in the field of view, and potentially between 0 and 1 for bins at the border between these two regions. So, the motion corrected sinogram will have elements which are scaled versions of the reference sinogram:

$$10 \quad s_b = d_b s^r_b, \quad (3)$$

with:

$$d_b = \frac{1}{N} \sum_t d^t_b \quad (4)$$

Since these scale factors are not all equal to each other, the motion corrected sinogram will be inconsistent (i.e. does not correspond to the sinogram of the subject in its reference position) and the reconstruction process will have to be adapted to take this into account. Otherwise, artefacts will occur.

Making the motion corrected sinogram consistent

When a scale factor d_b is non-zero, we could just divide the detector data s_b by it. However, for small scale factors division would lead to noise enhancement in the data. Therefore, a threshold is used so that when the scale factor is smaller than a threshold, the corresponding bin cannot be corrected by rescaling. Instead, an estimate of the value which should be in the bin is separately calculated. From an initial estimate of the image, taken from only the non-oblique LORs, referred to as the direct sinograms. This is then forward projected to obtain an estimate of the value s^r_b of the bin in the reference sinogram.

A consistent sinogram can be estimated as:

$$s^c_b = \begin{cases} s_b / d_b & \text{if } d_b > a_b \\ s^r_b & \text{otherwise} \end{cases} \quad (5)$$

where s_b^f is the value of the forward projection of the initial image, and a_b is the threshold. The threshold can be a global threshold applied to all bins, or may be a local threshold varying depending on the bin identity.

The motion correction software application 52 preferably includes functionality allowing the threshold, whether global or local, to be varied between different acquisitions, depending on the quality of the data obtained.

Construction of the initial estimate of the image

As mentioned above, the initial estimated image can be produced by a reconstruction of the direct sinograms. However, even the direct sinograms can have missing data, especially in the end planes. One solution for this is to discard those end planes of the initial image that are too corrupted. In the case that too many direct sinograms are corrupted by rotation, an alternative would be to reconstruct the initial image from a set of oblique projections orthogonal to a direction not parallel to the scanner axis.

With both these procedures, it is possible to end up with an initial image that is shorter than the scanner field of view. It is then important to consider which LORs are used in the final reconstruction process. The values of the estimated bins s_b^f will correspond to an object which is as long as the initial image, while the motion corrected data s_b could have contributions of activity which does not overlap with the initial image. These bins are discarded, as otherwise the data would still have potential inconsistencies.

The end result of this procedure will be a final reconstructed image that will have fewer planes than usual (i.e. the same number as in the initial image), but the image will have no artefacts.

Determination of the scale factors

The scale factors d'_b defined in equation (2) are (approximately) independent of the sinogram that is being motion corrected. Their role is similar to the (inverse of the) usual normalisation factors in PET.

The scale factors can be computed by motion correcting a data set which has 1 in every LOR, and a set of LORs is sampled after the motion correction to produce scale factors which vary across the entire sinogram.

Both sinograms in equation (2) have now all elements equal to 1, so:

$$d' = M' u_m \quad (6)$$

with u_m a $1 \times m$ column vector with all elements equal to 1. This can be computed by a loop over all possible LORs, repositioning the LOR, and storing 'events' in the sinogram using the same interpolation as used in the actual motion correction.

Computing the scale factors d_b , which are averaged over the whole frame using equation (4), is highly processor-intensive. Several optimisations are possible. The number of time steps in the sum can be made smaller as the motion parameters tend to vary smoothly aside from sudden jumps. In addition, if an appropriate interpolation scheme is used during the motion correction, the set of bins which has scale factor 1 is a geometrically connected region. This means that the scale factors d_b can first be computed in with low precision, and that then edges in the resulting sinogram can be recomputed with higher precision.

20 *Determination of the thresholds*

The role of the thresholds a_b is to avoid noise amplification. A number of approaches are possible. For instance, strong smoothing on the motion corrected sinogram s can be applied to obtain a rough estimate of the noise level in each bin which would enable us to use lower values for the higher values in the each bin.

This means they can be chosen lower where the motion corrected data is less noisy. Because of the Poisson nature of PET data, the relative noise level decreases with higher values of the mean (over repeated experiments) value of s_b . However, the data in a single sinogram bin is generally too noisy to use as an estimate for this mean value. This can be remedied by apply a strong smoothing on the motion corrected sinogram s to obtain a rough estimate of the

noise level in each bin. The threshold can then be made lower for higher values of the bin in the smoothed sinogram. After this, the smoothed sinogram is discarded. Alternatively, a global threshold (i.e. independent on b), may be used. The global threshold may be varied in dependence on a factor such as the total
 5 number of counts in a sinogram.

The higher the threshold, the more data will be replaced by the separately calculated forward projections. Since the estimated forward projections generally have lower resolution compared to the measured data, setting the threshold higher will result in images with lower resolution but less noise.

10

Normalisation for detection efficiencies

In practice, different LORs will have different detection efficiencies, which can be used to form a detection efficiency sinogram ε . The detected sinogram should be normalised to correct for these efficiencies. In one
 15 embodiment this is done before binning (i.e. the detection efficiency factor is obtained for an event, the LOR is repositioned, the event is weighted with the inverse of the detection efficiency factor and interpolated into the motion correct sinogram).

An alternative solution is to not perform normalisation during binning,
 20 but to include these scanner normalisation factors in the scale factors referred to above. In the case without motion correction, this has been shown to give better noise properties. To do this, the motion correction sinogram is obtained as in equation (1), where now s^t is however not precorrected for detection efficiencies. The result will again be (almost) proportional to a reference
 25 sinogram as in equation (3). Take as reference what would have been obtained without motion, but in this case with normalisation for detection efficiencies. These scale factors can then be found by looking at smooth objects. That is, by assuming that the reference data is a sinogram filled with 1s. The non-normalised measured data will then be the detection efficiency sinogram ε . The
 30 analogue of equations (4) and (6) is now:

$$d = \frac{1}{N} \sum_t M^t \varepsilon \quad (7)$$

These scale factors will no longer all be less than or equal to 1, as they depend on ϵ . This can be taken into account when setting the thresholds.

5 *Other precorrections*

If the list-mode data contains delayed events, then randoms correction can be performed during the binning by subtracting the delayed events after repositioning. If some other way of estimating the randoms is used, the motion would have to be taken into account.

10 For scatter, it can be assumed that all of the scatter is due to the subject. In that case, the scatter distribution is just moved along with the subject resulting in a scatter distribution which is exactly the same as the scatter distribution of the subject in the reference position. So, any existing scatter correction procedure can be used on the motion corrected data. However, some scatter is due to non-
15 moving objects, such as the bed and the scanner itself. This can be corrected by estimating the scatter distribution caused by the non-moving objects in multiple positions and motion correcting the results.

Finally, there is attenuation correction. However, after motion correction, the attenuation factors are the same as those for the subject in the
20 reference position. Preferably, the reference position is chosen to be the position of the subject during transmission scanning.

Description of specific procedure

A step-by-step description of one embodiment of the motion correcting
25 procedure follows:

1. Obtain attenuation coefficients of subject in the reference position. This can be done using the following procedure:

- (i) Perform a blank and transmission scan.
- (ii) Reconstruct an image representing the attenuation map of the
30 subject using the transmission and blank data.
- (iii) Move the attenuation map to the reference position by reinterpolation.

- (iv) Forward project this attenuation map and exponentiate.
2. Perform a list-mode emission scan while tracking the motion of the subject.
 3. Bin the list-mode data into a motion corrected sinogram by repositioning the LORs. Normalise the events for detection efficiencies.
 4. Obtain the scale factors equation (4) or (7) depending on whether events were normalised or not in the previous step.
 5. Obtain thresholds a_b .
 6. Divide the motion corrected sinogram by the scale factors d_b , unless the scale factor is too small. In that case, rescale the data with the threshold:
- $$s^m_b = \begin{cases} s_b / d_b & \text{if } d_b > a_b \\ s_b / a_b & \text{otherwise} \end{cases}$$
7. Correct the resulting sinogram s^m for scatter and attenuation as usual. Call the result s^p .
 8. Reconstruct initial image from a consistent subset of this precorrected sinogram. This image can be shorter than the field of view.
 9. Reduce the size of the 3D sinogram s^p such that only LORs are considered which intersect the initial image, but no other parts of the subject.
 10. Merge the forward projections (by using line integrals) of the initial image into the precorrected sinogram:

$$s^c_b = \begin{cases} s^p_b & \text{if } d_b > a_b \\ s^f_b & \text{otherwise} \end{cases}, \text{ where } s^f \text{ is the forward projected data.}$$

The result of this procedure is a consistent, fully-precorrected 3D sinogram (ignoring the effects of noise). This can then be passed to any known 3D reconstruction algorithm that works on fully precorrected data.

Alternatives to the above-described embodiments are envisaged. Whilst in the above embodiment, the detector data is output to a list-mode file which is then processed offline to perform motion correction, in an alternative embodiment of the invention the motion correction system of the present

invention may be built into a scanner, so as to provide online motion correction of LORs which can then be used to directly generate a sinogram.

Whilst in the above-described embodiments, where the original measured data is inconsistent due to motion of the subject, the original measured data can be either rescaled or replaced with a separately calculated value. Alternatively, a weighted average of the two types of corrected data may be taken when the scale factor falls below the preset threshold; or a varying weighting can be applied in dependence on the scale factor value.

It should be noted that the invention applies also to PET scanners in general, both non-rotating and rotating. Further, although the above-described embodiment relates to a PET system, the method of the invention could also be used in other systems of tomography, such as x-ray computer tomography (CT) and single photon emission computer tomography (SPECT).

The motion correction method of the invention may be used in combination with analytic image reconstruction algorithms such as 3DRP, FAVOR, BPF, etc. Alternatively, or in addition, the method of the invention may be used with analytic rebinning algorithm such as FORE, FORE-X, FORE-J, in combination with an iterative reconstruction algorithm, or indeed iterative algorithms which work on precorrected data.

The above embodiments are to be understood as illustrative examples of the invention. It is to be understood that any feature described in relation to any one embodiment may be used alone, or in combination with other features described, and may also be used in combination with one or more features of any other of the embodiments, or any combination of any other of the embodiments. Furthermore, equivalents and modifications not described above may also be employed without departing from the scope of the invention, which is defined in the accompanying claims.

Claims

1. A method of conducting motion correction for a tomographic scanner including a detector array for detecting radiation to generate detector data, wherein the method comprises:
- 5 storing detector data collected during a data acquisition period, said detector data being indicative of:
- i) directions along which radiation is detected; and
- ii) quantities of radiation detected in different of said directions;
- 10 storing movement data representing movement of the subject during the data acquisition period; and
- motion correcting said detector data using said movement data and a motion correction algorithm to calculate motion corrected detector data,
- wherein said motion correcting step comprises processing said detector
- 15 data by:
- a) realigning directions of at least some of said detector data on the basis of said movement data; and
- b) altering quantities of at least some of said detector data on the basis of said movement data,
- 20 such that at least some of said detector data are both realigned and altered in quantity.
2. A method according to claim 1, wherein said altering quantities step comprises rescaling quantities.
- 25
3. A method according to claim 1 or 2, wherein said altering quantities step comprises replacing quantities with calculated quantities.
4. A method according to claim 1, 2 or 3, wherein the method
- 30 comprises both rescaling a quantity and separately calculating a quantity.

5. A method according to claim 4, wherein the method comprises selectively rescaling a quantity and/or utilising a separately calculated quantity, on the basis of a threshold.

5

6. A method according to any of claims 5, wherein said threshold is variable.

7. A method according to claim 5 or 6, wherein a value indicating an amount of scaling deemed appropriate for a quantity is determined, and the value is compared to the threshold in order to determine whether to scale the quantity upwards or to replace it with a calculated quantity.

8. A method according to any preceding claim, further comprising performing image reconstruction using said improved detector data.

9. A method according to claim 8, comprising performing image reconstruction using an analytic image reconstruction algorithm and/or an analytic rebinning algorithm.

20

10. A method according to claim 9, wherein said algorithm is one of 3DRP, FAVOR, BPF, FORE, FORE-X and FORE-J.

11. A method according to any preceding claim, wherein said scanner is a positron emission tomography (PET) scanner.

25

12. A method according to claim 11, wherein said detector data is 3D PET detector data.

13. Computer software for conducting motion correction for a tomographic scanner including a detector array for detecting radiation to generate detector data, wherein the software is adapted to:

30

store detector data collected during a data acquisition period, said detector data being indicative of:

- i) directions along which radiation is detected; and
- ii) quantities of radiation detected in different of said directions;

5 store movement data representing movement of the subject during the data acquisition period; and

motion correct said detector data using said movement data and a motion correction algorithm to calculate motion corrected detector data,

wherein said motion correcting step comprises processing said detector data by:

- a) realigning directions of at least some of said detector data on the basis of said movement data; and
- b) altering quantities of at least some of said detector data on the basis of said movement data,

15 such that at least some of said detector data are both realigned and altered in quantity.

14. A data carrier comprising computer software according claim 13.

20 15. A tomographic scanner system including a detector array for detecting radiation to generate detector data, wherein the scanner system is adapted to:

store detector data collected during a data acquisition period, said detector data being indicative of:

- 25 i) directions along which radiation is detected; and
- ii) quantities of radiation detected in different of said directions;

store movement data representing movement of the subject during the data acquisition period; and

30 motion correct said detector data using said movement data and a motion correction algorithm to calculate motion corrected detector data,

wherein said motion correcting step comprises processing said detector data by:

- a) realigning directions of at least some of said detector data on the basis of said movement data; and
 - b) altering quantities of at least some of said detector data on the basis of said movement data,
- 5 such that at least some of said detector data are both realigned and altered in quantity.

Abstract

A method of conducting motion correction for a tomographic scanner including a detector array for detecting radiation to generate detector data,
5 wherein the method comprises:

storing detector data collected during a data acquisition period, said detector data being indicative of:

i) directions along which radiation is detected; and

ii) quantities of radiation detected in different of said directions;

10 storing movement data representing movement of the subject during the data acquisition period; and

motion correcting said detector data using said movement data and a motion correction algorithm to calculate motion corrected detector data,

15 wherein said motion correcting step comprises processing said detector data by:

a) realigning directions of at least some of said detector data on the basis of said movement data; and

b) altering quantities of at least some of said detector data on the basis of said movement data,

20 such that at least some of said detector data are both realigned and altered in quantity.

[Fig. 1]

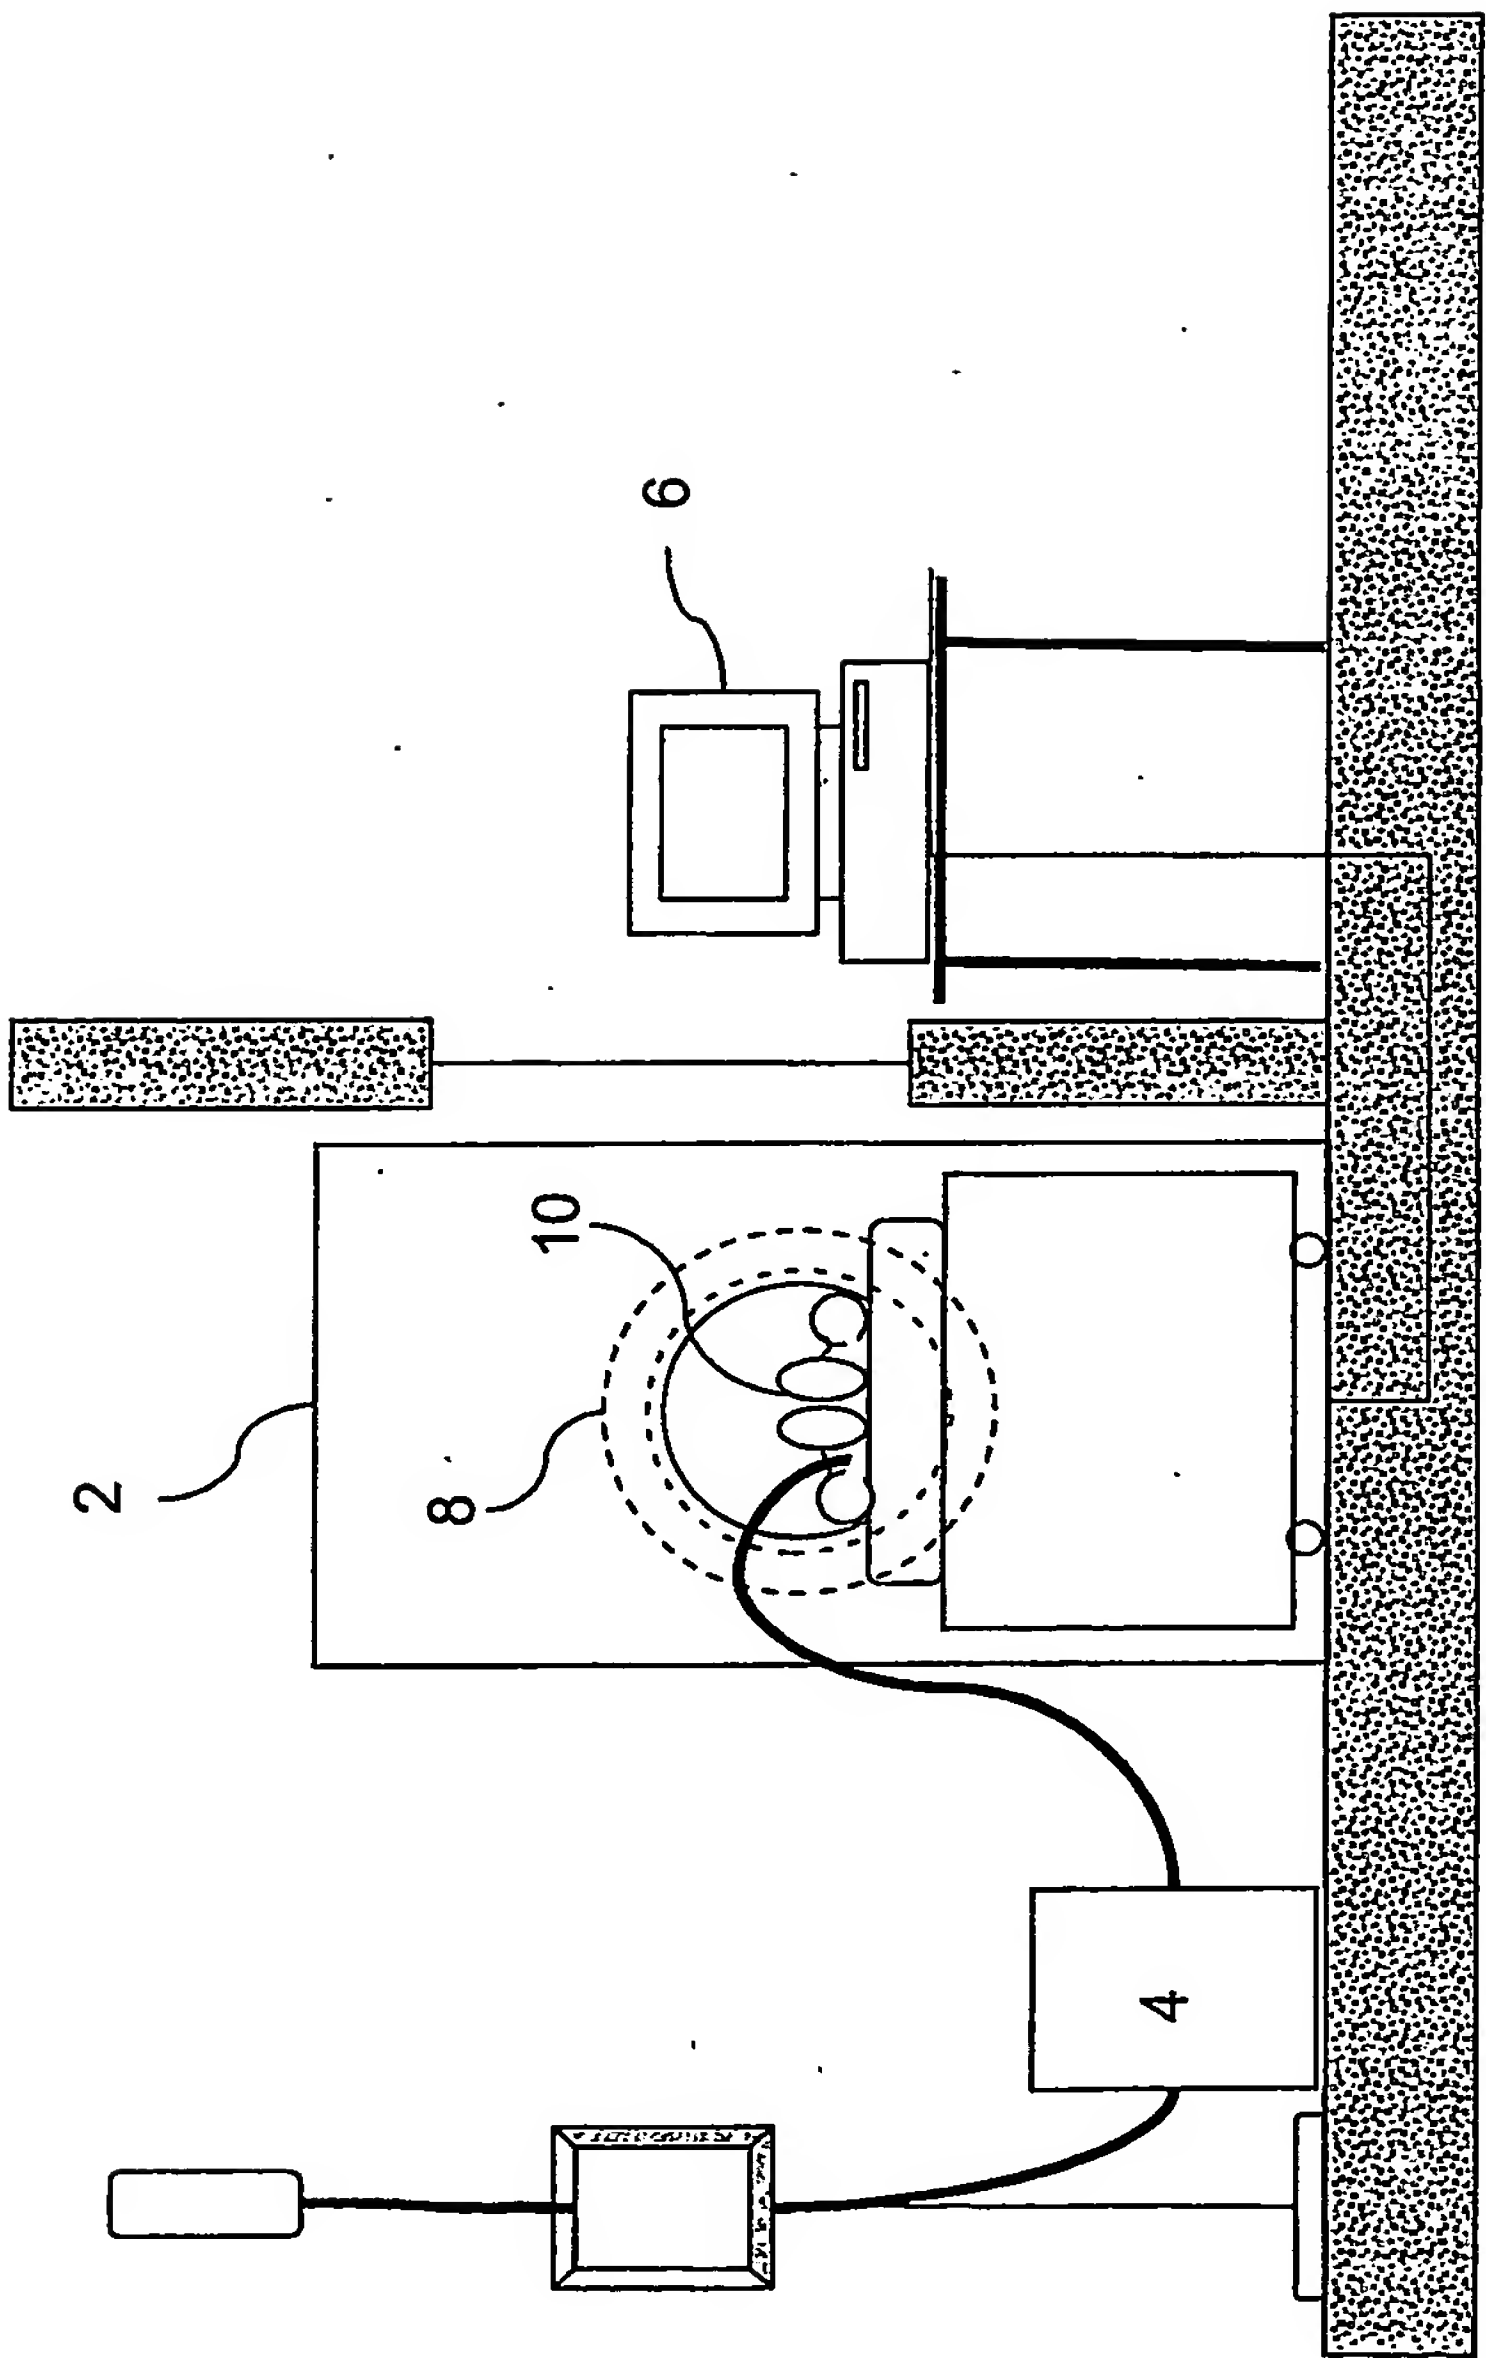


Figure 1

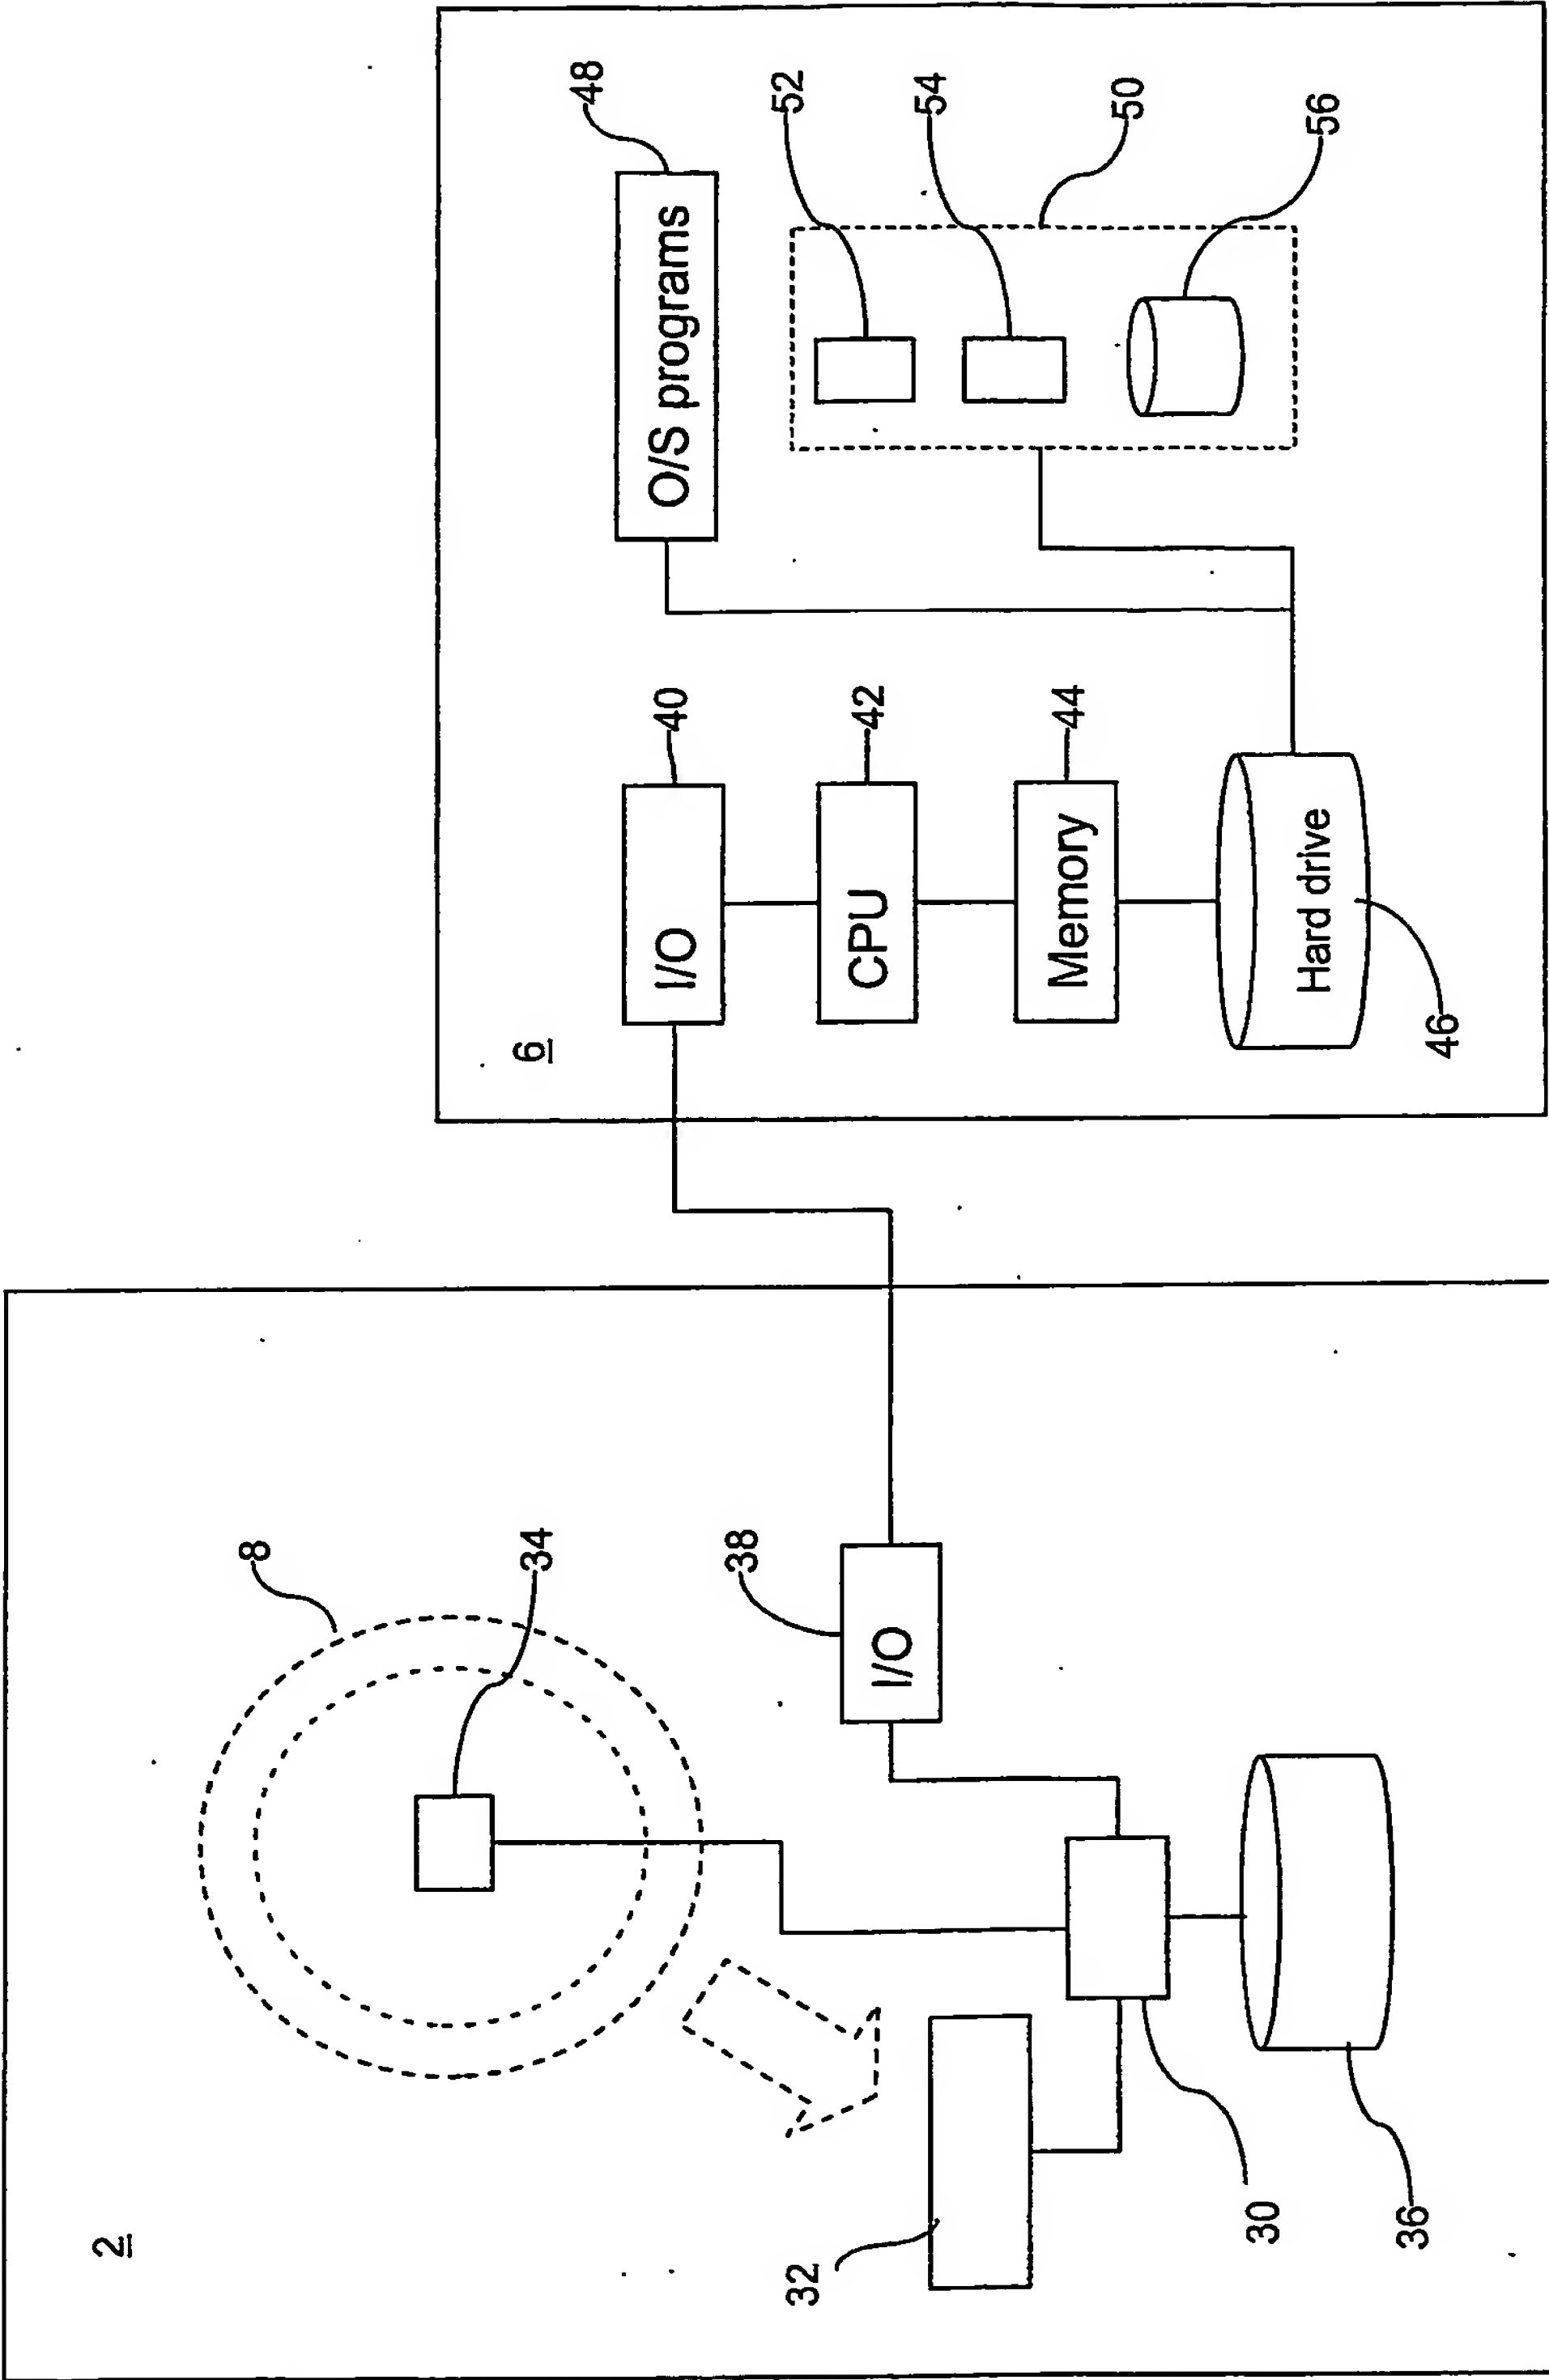


Figure 2

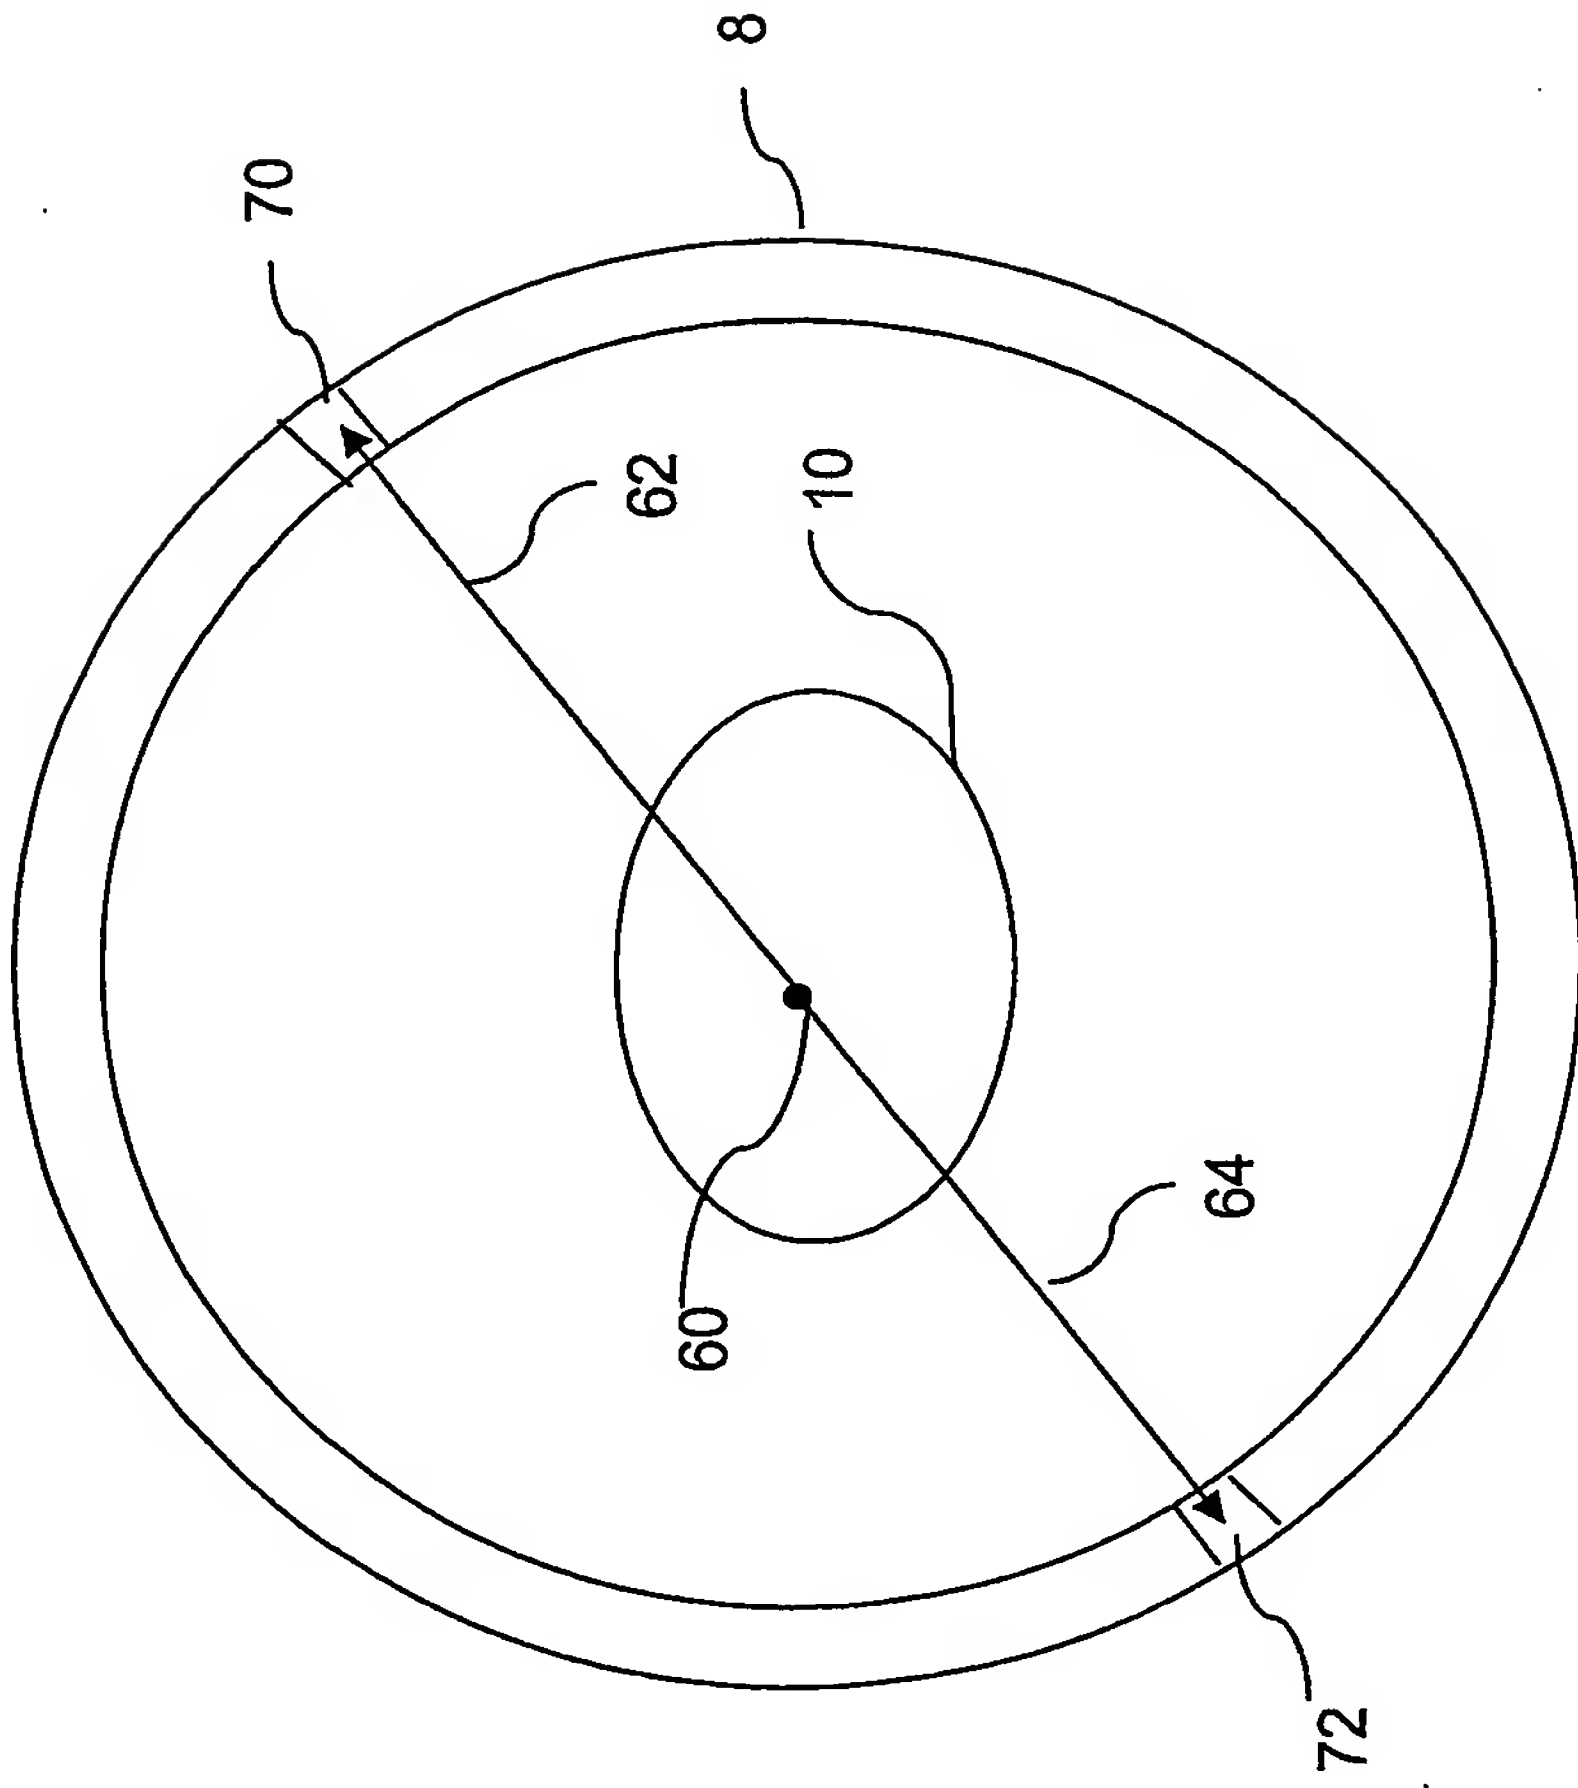


Figure 3

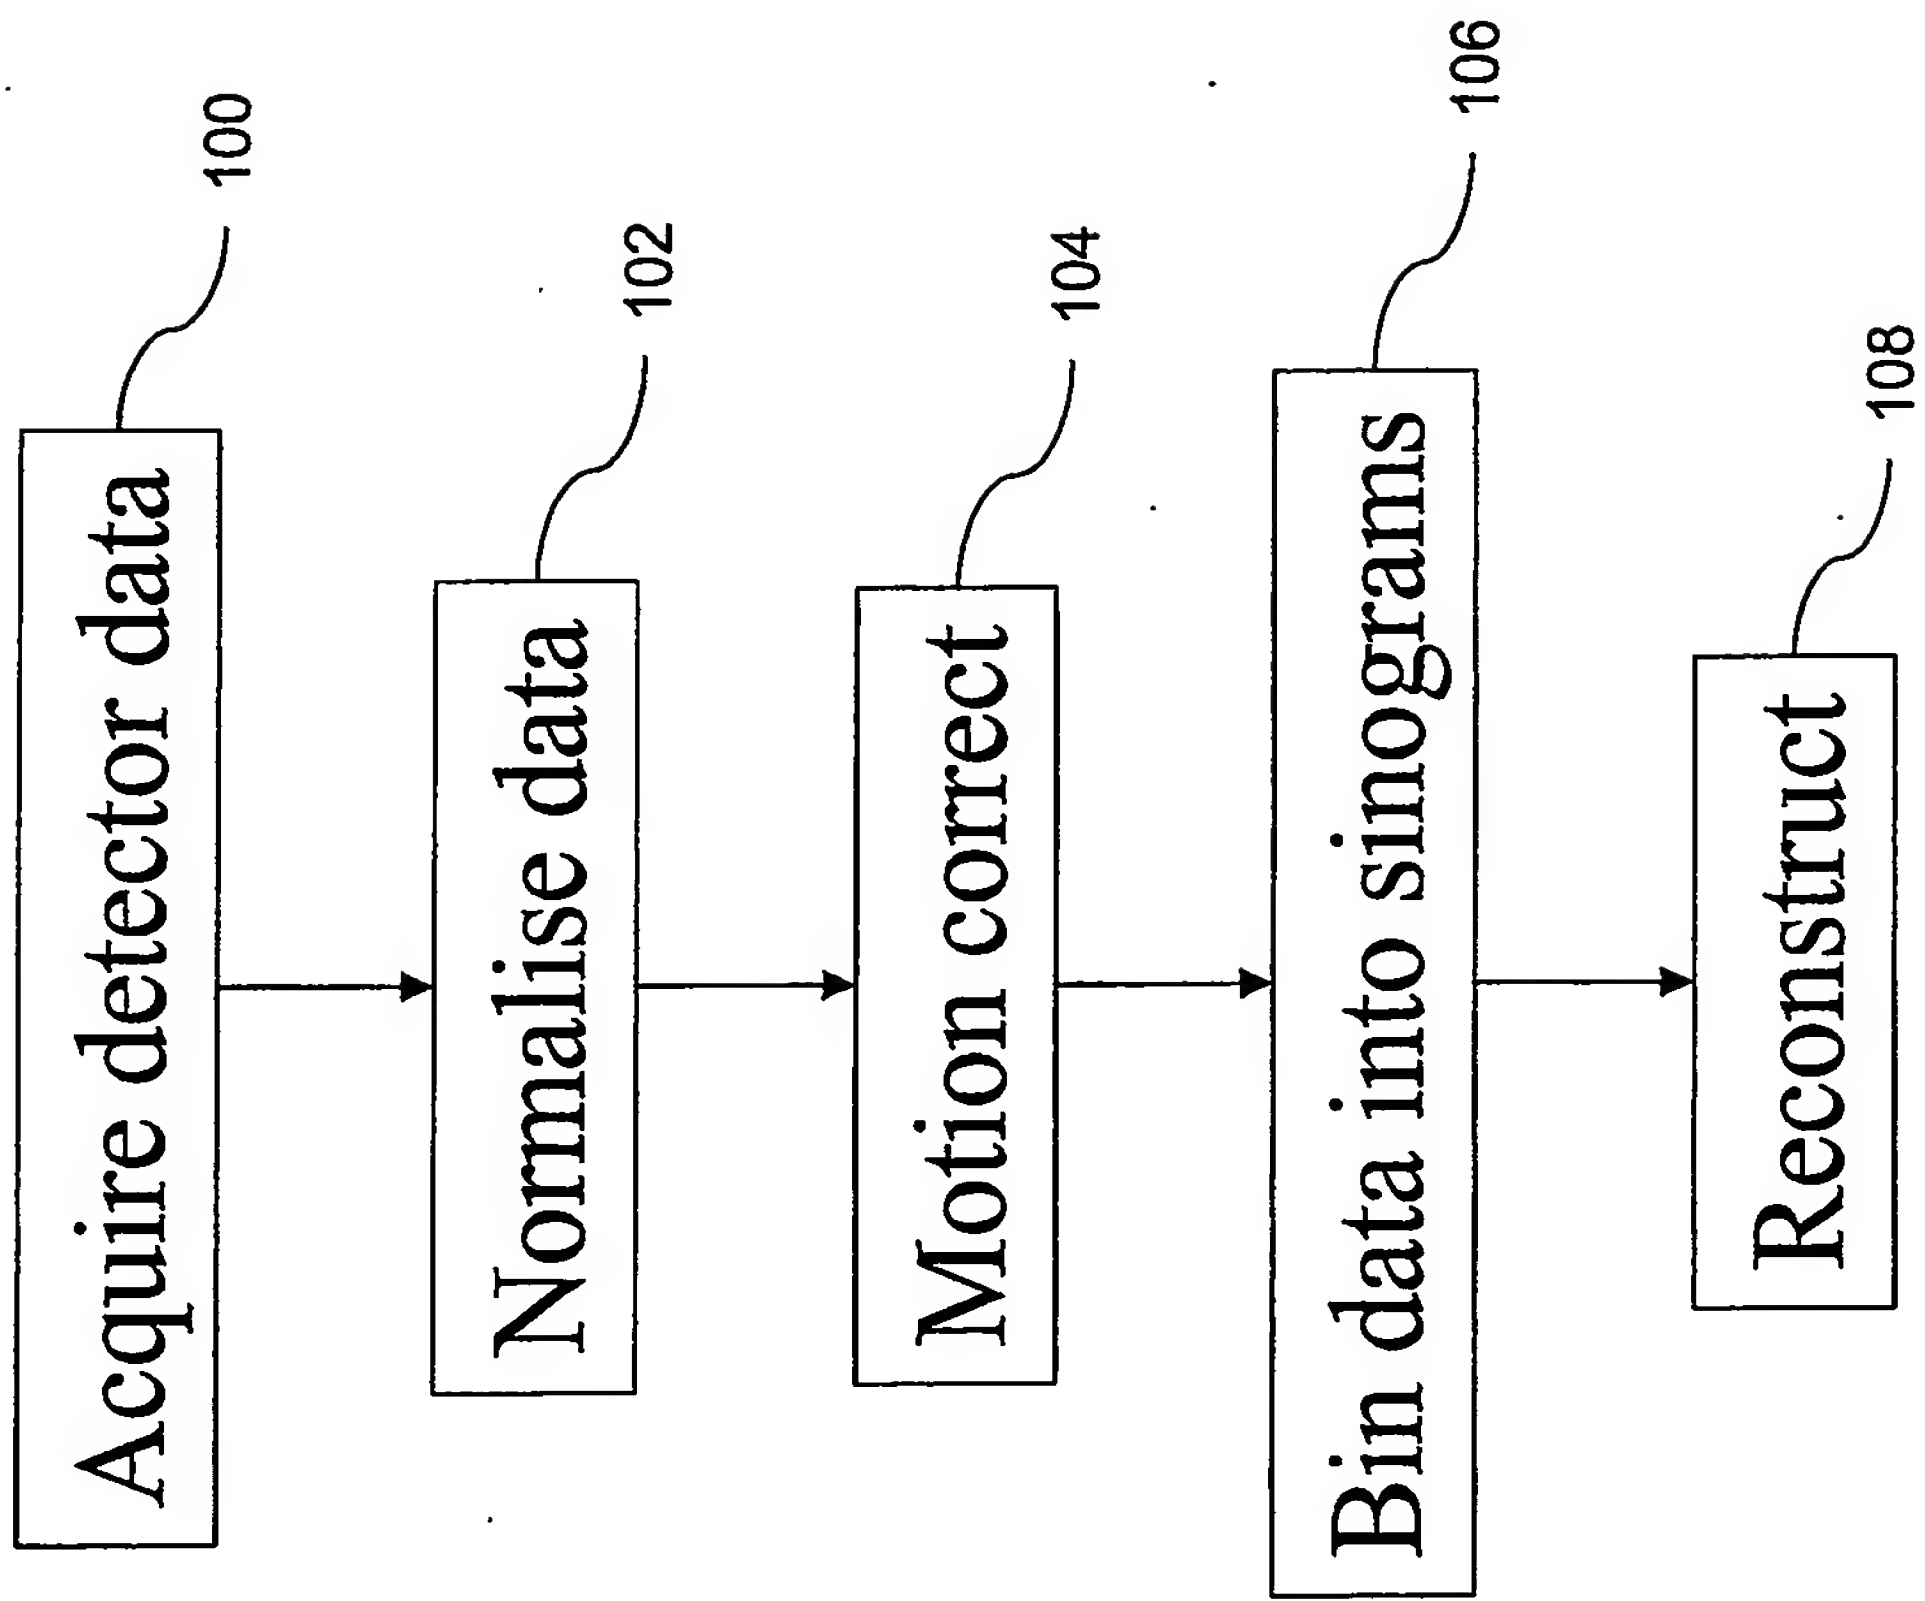


Figure 4

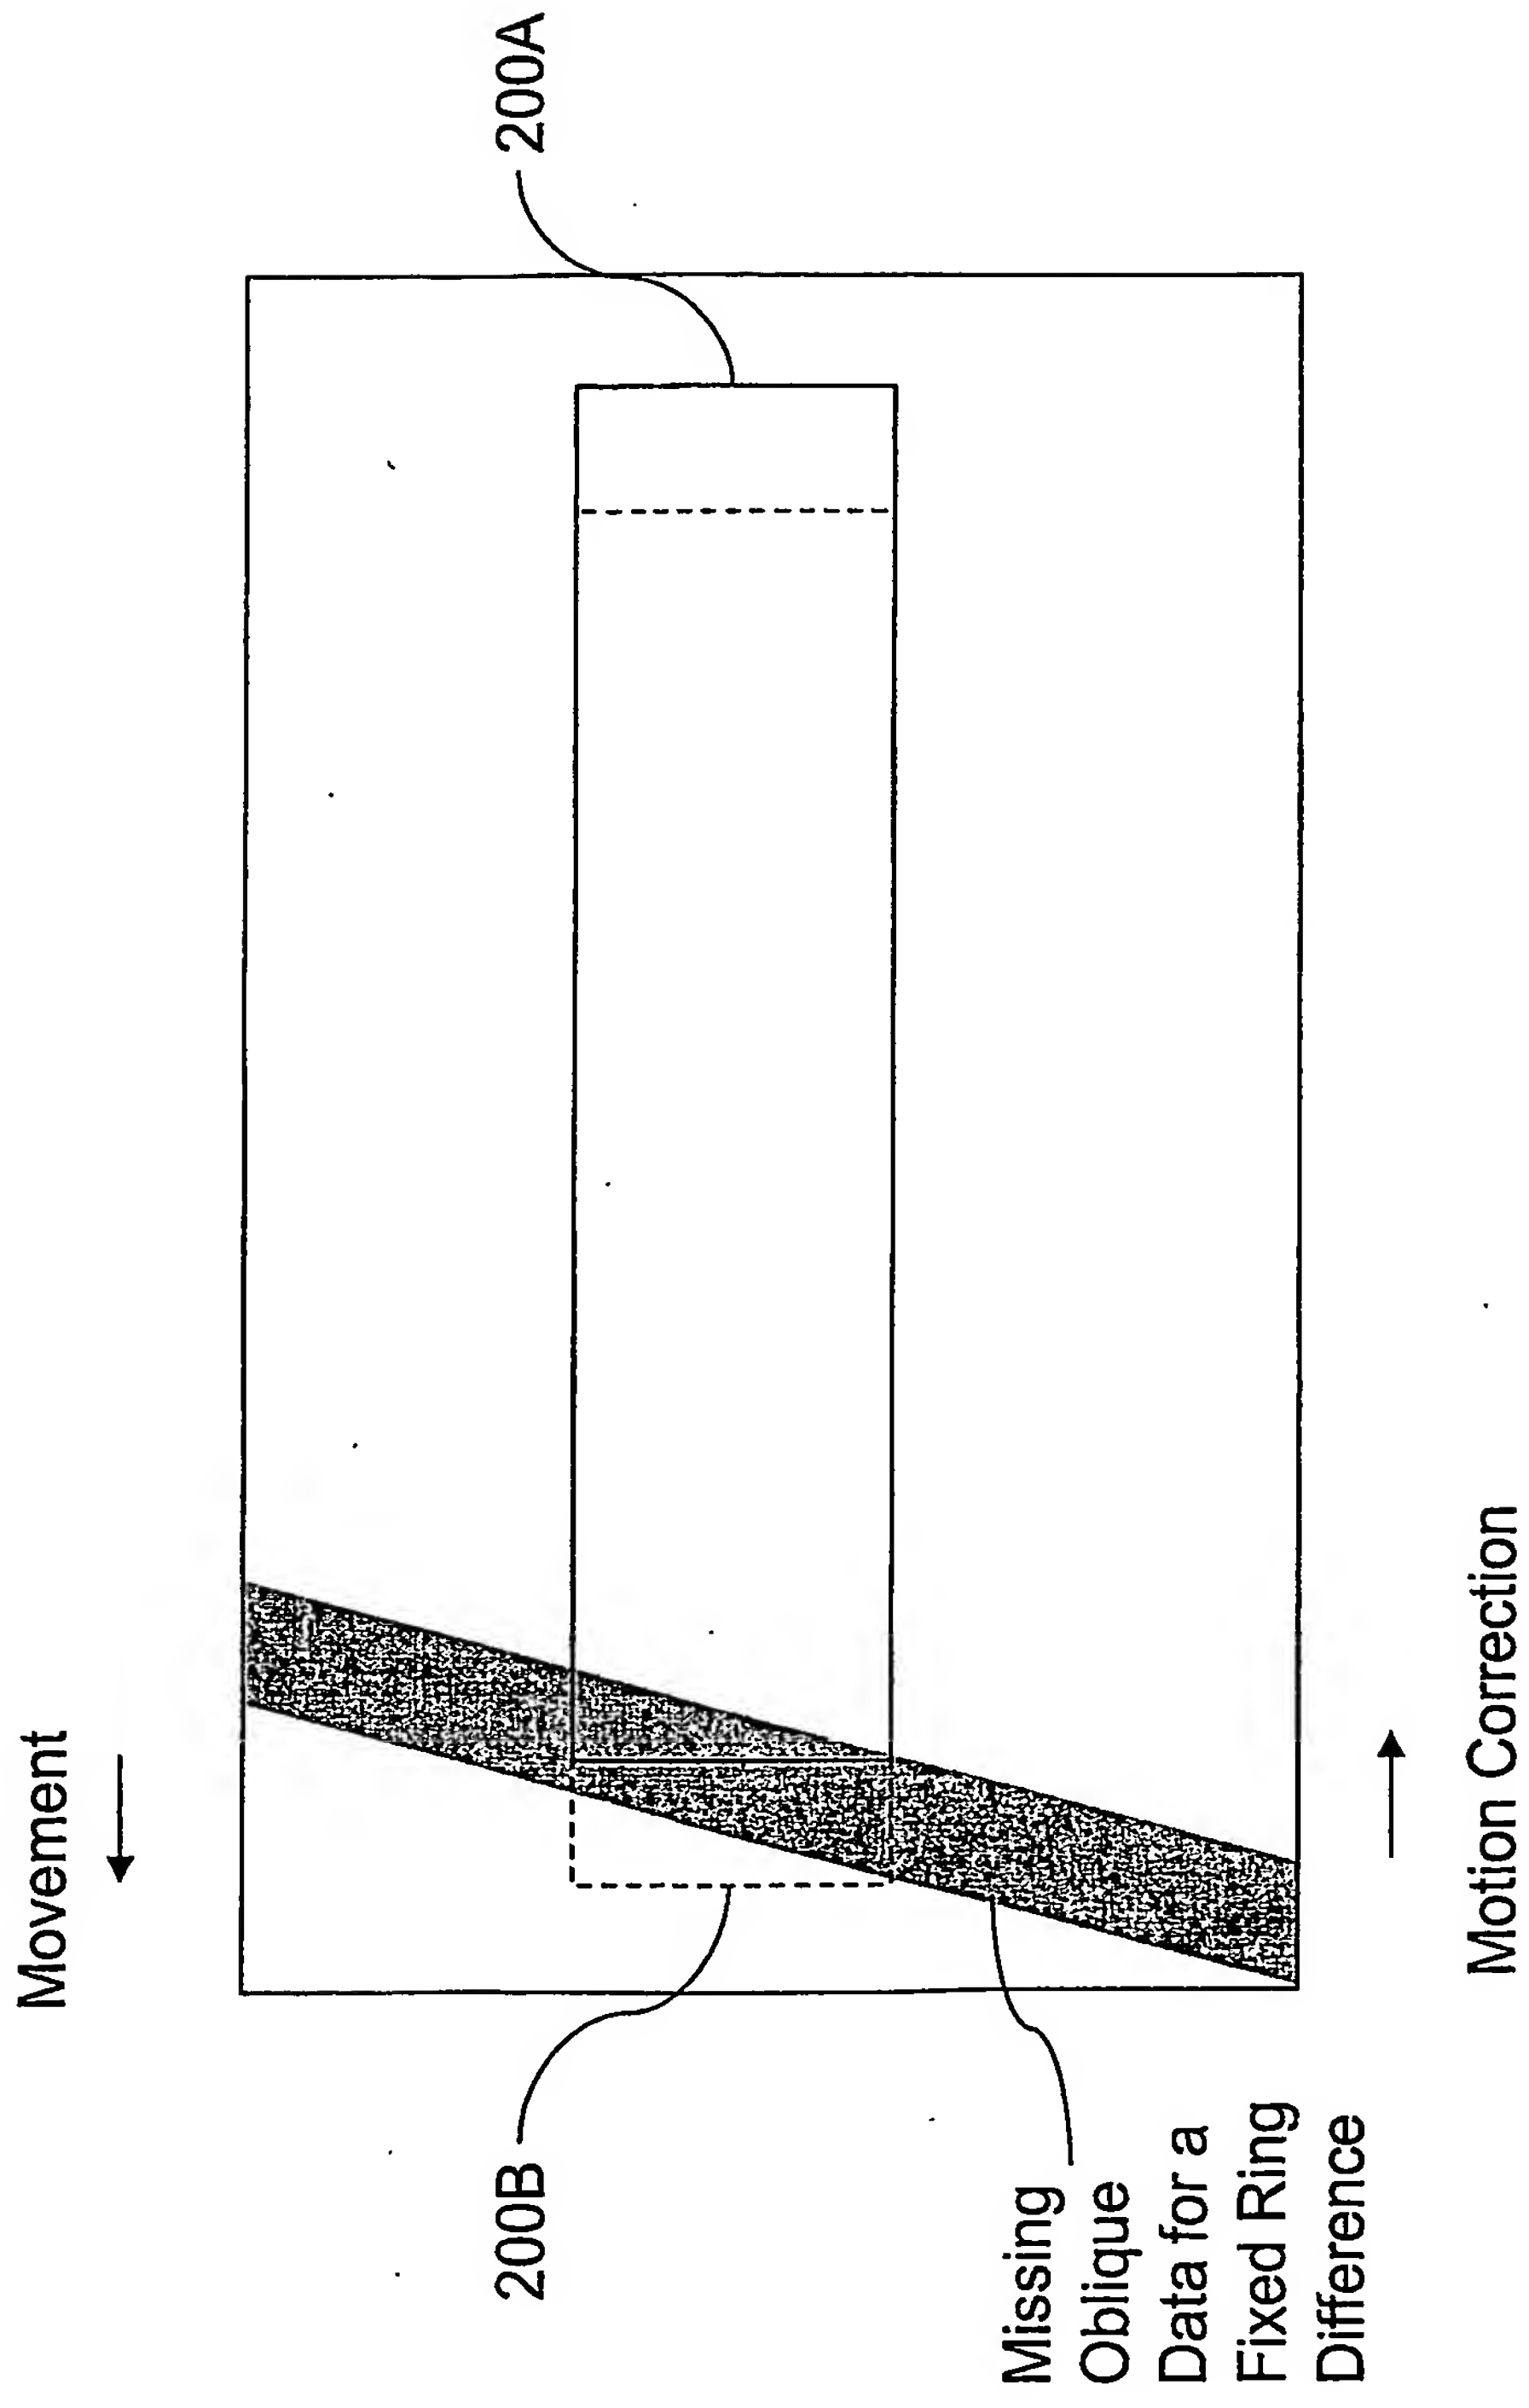


Figure 5

BEST AVAILABLE COPY

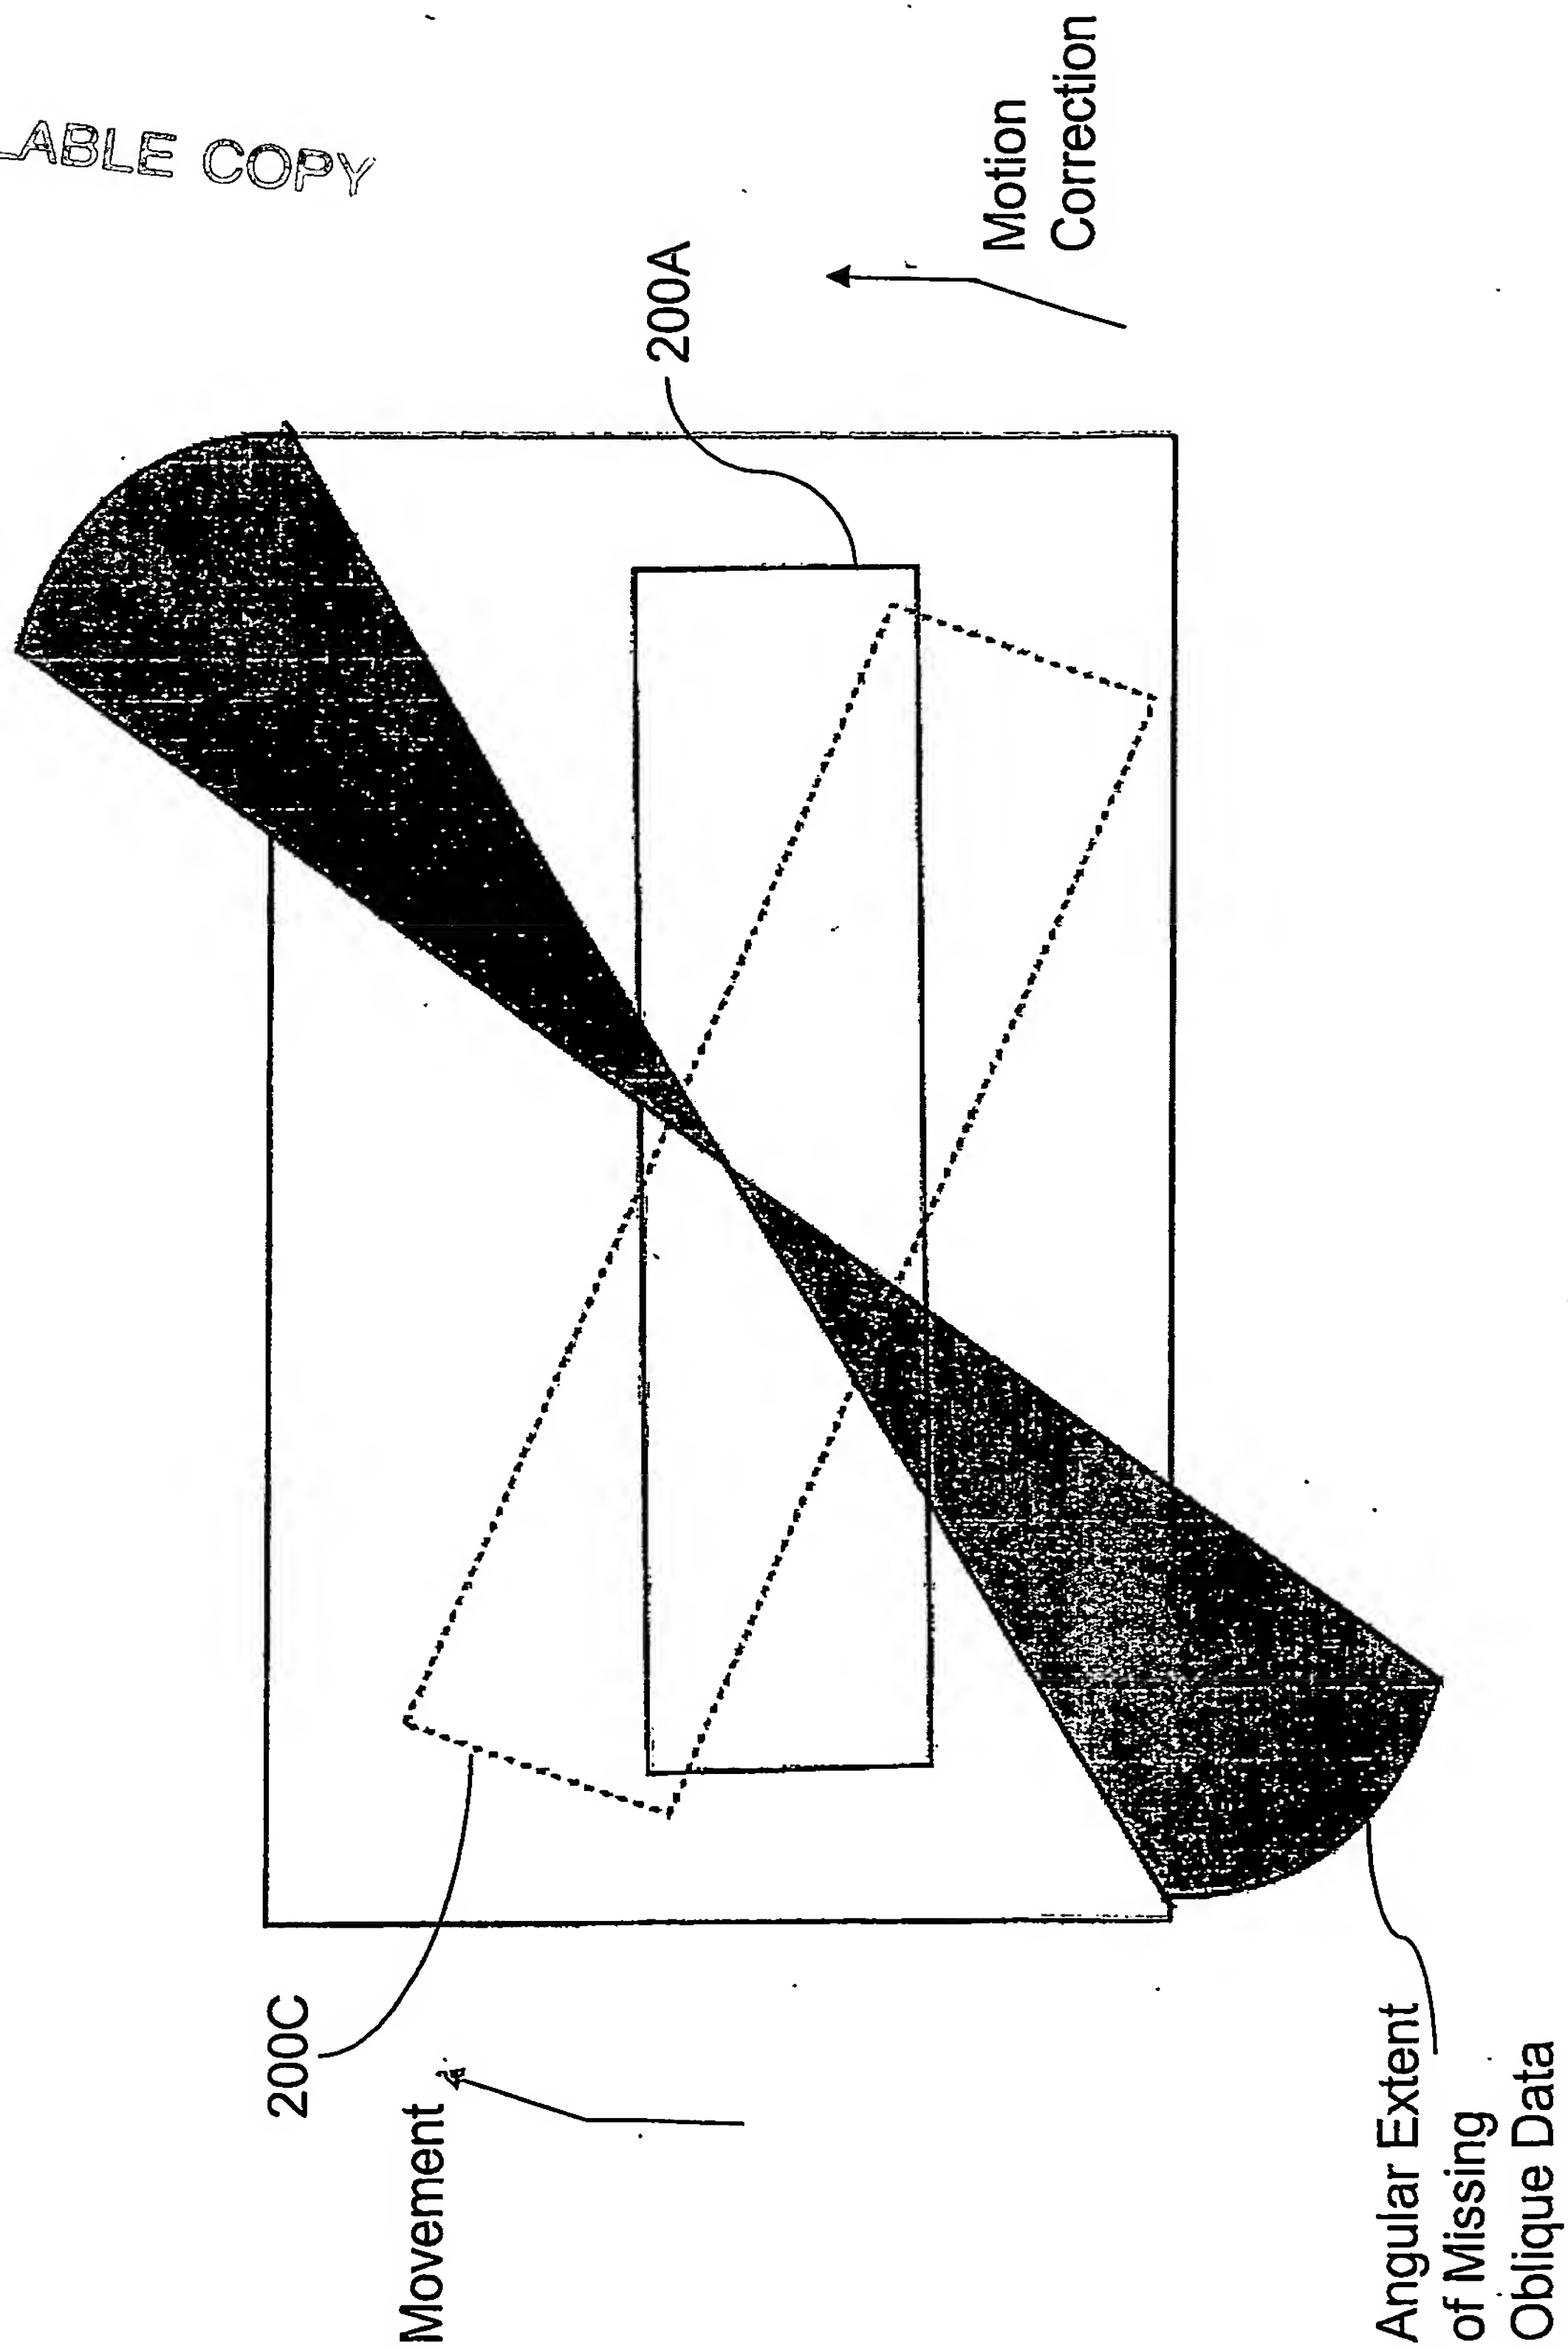


Figure 6

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.